

551,255

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)


PCT

(10) International Publication Number  
**WO 2004/085090 A1**

- (51) International Patent Classification<sup>7</sup>: **B21D 53/10, F16C 33/20**
- (21) International Application Number: **PCT/GB2004/000408**
- (22) International Filing Date: 3 February 2004 (03.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0307120.6 27 March 2003 (27.03.2003) GB
- (71) Applicant (for all designated States except US): MINEBEA CO LTD. [JP/JP]; 4106-73 Oaza Miyota, Miyota-machi, Kitasaku-gun, Nagano 389-0293 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SHORE, David
- [GB/GB]; 55 Lincoln Road, Dunholme, Lincoln, LN2 3QU (GB). BENNETT, Chris [GB/GB]; 8 Preston Road, Newark, Notts NG24 2GE (GB).
- (74) Agent: FORRESTER KETLEY & CO; Forrester House, 52 Bounds Green Road, London N11 2EY (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: A BUSH AND METHOD OF MANUFACTURING A BUSH

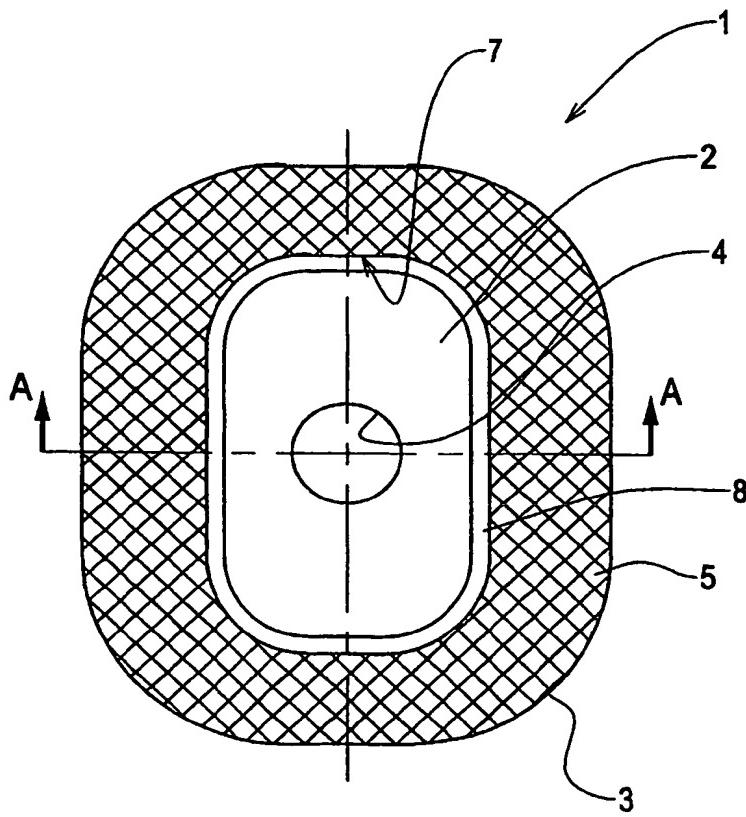

(57) Abstract: A lined and flanged bush (1) and method of manufacturing the same comprising the steps of: providing a liner (5) having an aperture (7); locating the aperture in the liner around the spigot (2) such that the liner lies on the surface (6); and stamping out the blank around the spigot to provide a lined and flanged bush.

WO 2004/085090 A1



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*